


Multivariable (MVS) Transmitter to Flow Computer

OleumTech Multivariable Transmitters are utilized to provide Differential Pressure (DP), Static Pressure (SP), and Temperature values back to a flow computer (EFM) such as ABB Totalflow, Emerson ROC, and Thermo Autoflex, etc.

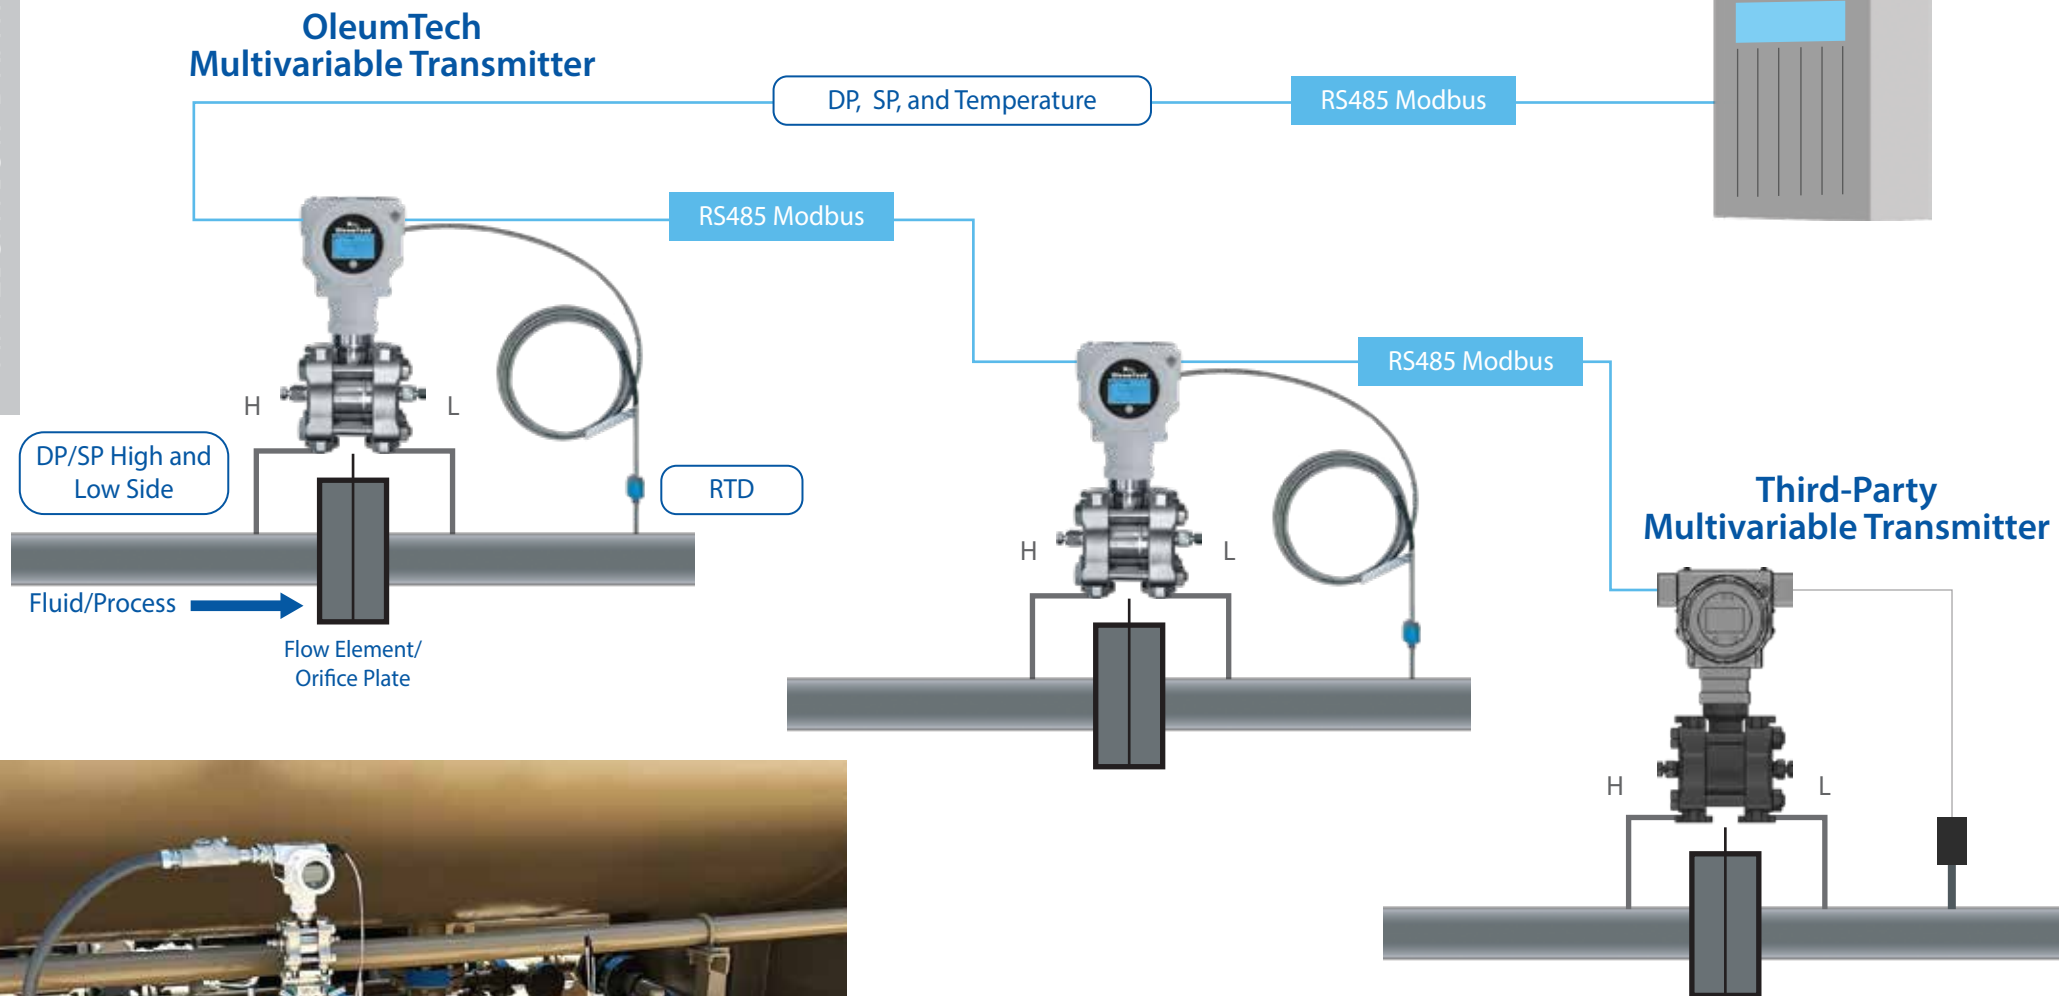

The MVS Transmitter is typically used on multiple meter runs. This is more cost-effective than having a flow computer on each meter tube. The MVS Transmitter is daisy chained via RS485 and ultimately back to the flow computer. The OleumTech MVS Transmitter can be dropped in with other transmitters, such as the Rosemount 4088A as well as the ABB XMV.

866.508.8586

sales@oleumtech.com

©2025 OleumTech Corporation. OleumTech is registered trademark of OleumTech Corporation. Other trademarks are the property of their respective owners. Specifications, design, and product descriptions subject to change without notice. Doc ID: AD-1095-001_A

OleumTech®