DATASHEET

DH2

Highlights

- Wirelessly gather/distribute sensor data
- Map I/O anywhere within the network
- Modbus Master/Slave functionality
- 1 configurable Serial/RTU port (RS232/RS485)
- Supports local Over-the-Air (OTA) functionality for updating OleumTech wireless devices (OTA Link Adapter required)[1]
- -40 ˚C to 80 ˚C (-40 ˚F to 176 ˚F)
- 900 MHz / 915 MHz / 2.4 GHz / 868 MHz
- Secure AES encryption
- Class I, Division 2 (Zone 2) certified

US Patent #6,967,589

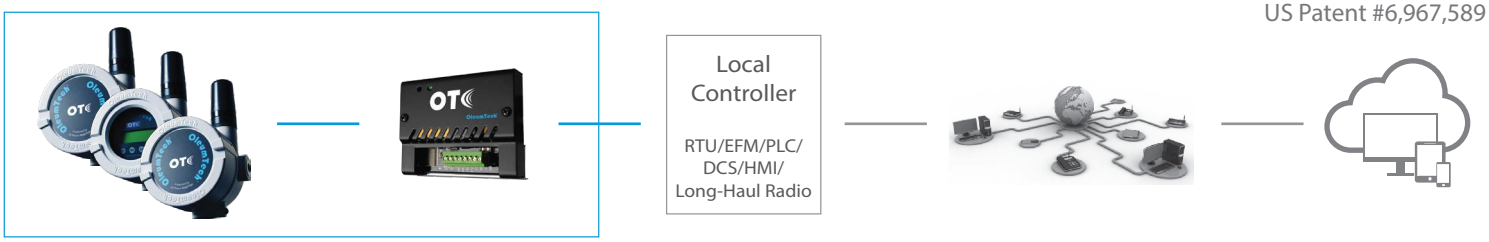

OTC Transmitters | OTC Gateway | Network Infrastructure | Cloud (Analytics)

Wireless Gateway with Serial Connectivity

Primary Data Collection Point

The OleumTech® DH2 Wireless Gateway plays an integral role in the OTC Wireless Sensor and I/O Network. It possesses the ability to aggregate data from OTC wireless transmitters and I/O modules onto its 1920-point register holding table. Third-party devices can access the data over the Modbus or LevelMaster ASCII protocol.

Serial Interface

With the provided RS232/RS485 configurable Serial port, the DH2 can virtually interface with any third-party Modbus device either as a Master or Slave device. You can gain visibility and control of stranded assets by using the DH2 as a secondary gateway or as a Master device. You can also integrate I/O capabilities for added versatility.

Advanced Peer-to-Peer Networking

Deploy multiple gateways to the OTC platform, creating a custom, highly scalable network. The gateways have the ability to communicate with one another. Leverage the peer-to-peer technology and funnel data to the primary gateway, optimizing network efficiency and/or designing an extremely flexible I/O mapping system across the entire wireless network.

Reliable, Trusted

The DH2 has been widely used for OTC Network deployments for over a decade, proving its reliability and robustness in harsh oilfields. The DH2 is the standard of excellence, resembling OleumTech's commitment to quality and innovation.

Technical Specifications

HARDWARE FEATURES	
Device Functionality	· Serial Wireless Gateway
Embedded Controller	· 32-bit Low Power ARM7 Microcontroller with Internal FLASH (Field Upgradeable)
Serial Interfaces	· RTU Port (RS232/RS485) Terminal Block · Modbus Master/Slave, LevelMaster ASCII Slave, ROC-Link Master (Supports Opcodes 17 and 10)
Configuration	· Config / Debug Port - RS232 Slave Only (RJ-45) / BreeZ® Software for PC
WIRELESS COMMUNICATIONS	
Radio Band	· ISM Band (License-Free)
900 MHz / 915 MHz	· FHSS, FSK, AES Encryption 256-bit (900 MHz), 128-bit (915 MHz)
2.4 GHz	· DSSS, AES Encryption 128-bit
868 MHz	· LBT-AFA, AES Encryption 128-bit
Bit Rate	· 900/915 MHz: 9600 bps / 115.2 kbps; 2.4 GHz: 250 kbps; 868 MHz: 80 kpbs
Output Power (Max)	· 900/915 MHz: 1000 mW; 2.4 GHz: 63 mW; 868 MHz: 25mW
Receiving Sensitivity	· 900/915 MHz: -110 dBm @ 9600 bps, -100 dBm @ 115.2 kbps · 2.4 GHz: -101 dBm @ 250 kbps; 868 MHz: -106 dBm @ 80 kbps
RF Range	· 900/915 MHz: Up to 40 Miles / 64 km with Clear Line of Sight[2] (Gateway to Gateway) · 900/915 MHz: Up to 7500 Feet / 1.4 Miles / 2.3 km with Clear Line of Sight[2] (Transmitter to Gateway) · 2.4 GHz: Up to 4.3 Miles / 7 km with Clear Line of Sight[2] (Gateway to Gateway) · 868 MHz: Up to 5.2 Miles / 8.4 km with Clear Line of Sight[2] (Gateway to Gateway)
CERTIFICATIONS & COMPLIANCE	
EMC/EMI	· FCC Part 15 (USA), IC ICES-003 (Canada), ACMA (Australia) · AS/NZS CISPR 32 (Australia), EN55032 & EN55024 (EU)
Safety	· Class I, Division 2, Groups A, B, C, D T4; Ex nA IIC T4 · Class I Zone 2 AEx nA IIC T4 · ATEX: Sira 14ATEX4143X; II 3 G Ex nA IIC T4 Gc · IECEx: SIR 13.0055X; Ex nA IIC T4 Gc
MECHANICAL SPECIFICATIONS	
Dimensions	· 3.8" (W) x 3" (H) x 1.4" (D) / 96.5 mm (W) x 76.2 mm (H) x 35.6 mm (D)
Package Dimensions	· 8" (W) x 6" (H) x 2.5" (D) / 203 mm (W) x 152 mm (H) x 63 mm (D)
Package Weight	· ~1 lbs / 0.4 kg
Mounting	· DIN Rail Mountable with Height Adjustability
ELECTRICAL SPECIFICATIONS	
DC Power Input	· 9-30 Vdc
Average Power Input	· 2 Watt
Power Consumption @12 Vdc	· 900/915 MHz @ 1000 mW: Receive Avg 55 mA, Transmit Avg 312 mA · 2.4 GHz @ 63 mW: Receive Avg 57 mA, Transmit Avg 117 mA · 868 MHz @ 25 mW: Receive Avg 54 mA, Transmit Avg 64 mA
Power Consumption @24 Vdc	· 900/915 MHz @ 1000 mW: Receive Avg 35 mA, Transmit Avg 175 mA · 2.4 GHz @ 63 mW: Receive Avg 37 mA, Transmit Avg 63 mA · 868 MHz @ 25 mW: Receive Avg 35 mA, Transmit Avg 46 mA
GENERAL SPECIFICATIONS	
Operating Conditions	· Temperature: Class I, Division 2 (Zone 2): -40 °C to 80 °C (-40 °F to 176 °F) · Humidity: 0 to 99 %, Non-Condensing
Warranty	· 2-Year Parts and Labor
Country of Origin	· USA
ORDERING INFORMATION	
Model Numbers	· WG-0900-DH2, WG-0915-DH2, WG-2400-DH2, WG-0868-DH2
Wirelessly Connects To	· OTC Wireless Devices (Gateways, Transmitters, I/O Modules)
Configuration Cable	· SX1000-CC2, OTC Configuration Cable Kit
OTA Link Adapter	· SXxxxx-OTA (xxxx = RF Type), SMA-Male, USB, Antenna Sold Separately

Networking Diagram

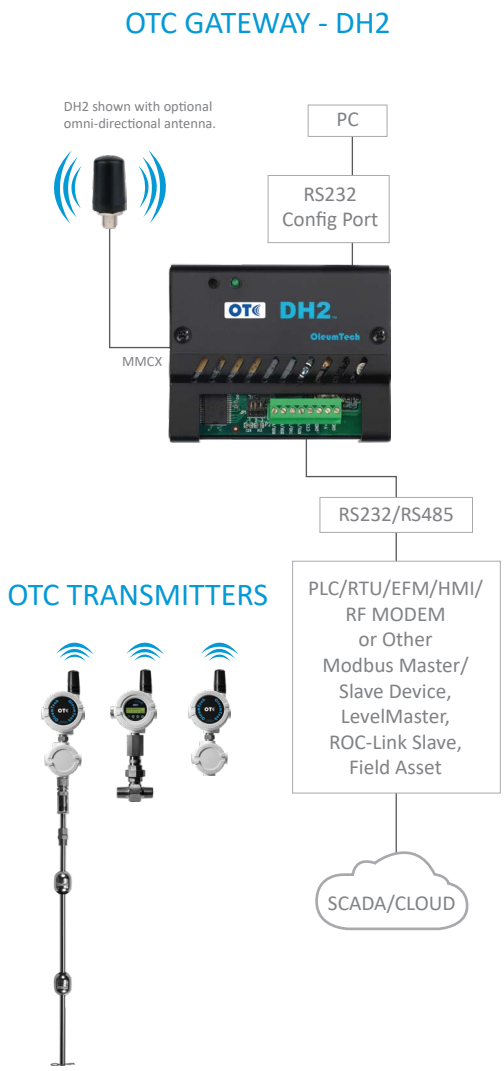

[1]OTA functionality does not support changing the radio settings or upgrading the device firmware.

[2]The maximum RF range data was collected under optimal test conditions, including a clear line of sight between antennas. Actual wireless RF range may vary depending on location, RF interference, weather, antenna type, cable type, and line of sight.

©2025 OleumTech Corporation. All rights reserved. OleumTech and BreeZ are registered trademarks of OleumTech Corporation in the United States. All other trademarks and trade names are the property of their respective holders. Specifications, design, and product descriptions subject to change without notice. This device contains proprietary intellectual property protected by US Patent #6967589. Document ID: 67-4003-001_AB

MADE IN USA