

DATASHEET  
**WT-RT1**  
**WT-RT2**




### ▶ Highlights

- WT-RT1 is available with a 2" to 18" RTD sensor
- WT-RT2 supports third-party RTD sensors
- High accuracy of  $\pm 0.15\text{ }^{\circ}\text{C}$  /  $\pm 0.06\%$  @  $0\text{ }^{\circ}\text{C}$  (WT-RT1)
- Up to a 10-year battery life<sup>1</sup>
- Advanced local LCD display interface
- Self-contained, rugged design
- Installs in minutes
- IP66,  $-40\text{ }^{\circ}\text{C}$  to  $70\text{ }^{\circ}\text{C}$  ( $-40\text{ }^{\circ}\text{F}$  to  $158\text{ }^{\circ}\text{F}$ )
- 900 MHz / 915 MHz / 2.4 GHz / 868 MHz
- Secure AES encryption
- Class I, Division 1 (Zone 0), Intrinsically Safe



US Patent #6,967,589

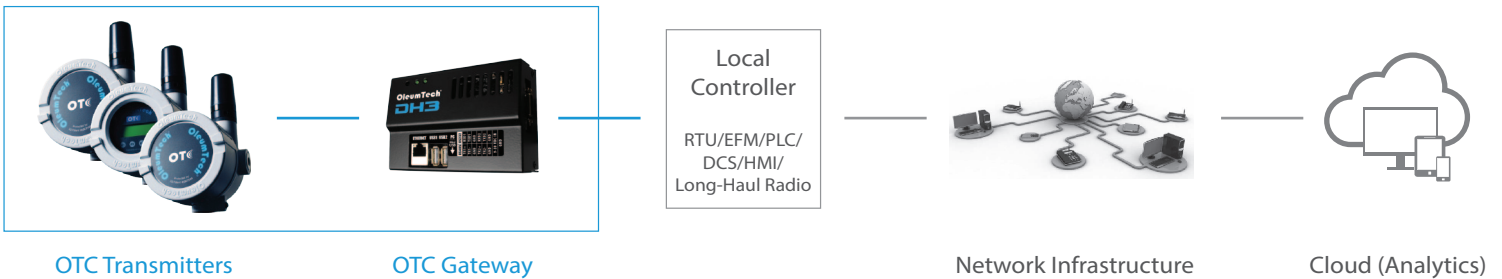

## ▶ Self-Contained Wireless Temperature Monitoring Solution

### Supports 2, 3, or 4-Wire RTD Sensor

The OleumTech® OTC Wireless RTD Temperature Transmitters are ideal for monitoring air, gas, water, or liquid temperatures. The WT-RT1 direct mount version is available with a 4-wire Platinum 100 ohm Class A RTD sensor with a high accuracy of  $\pm 0.15\text{ }^{\circ}\text{C}$  /  $\pm 0.06\%$  @  $0\text{ }^{\circ}\text{C}$ . You can choose from 2 to 18-inch RTD length. It supports temperatures ranging from  $-55\text{ }^{\circ}\text{C}$  to  $260\text{ }^{\circ}\text{C}$ . The WT-RT2 multi-vendor version provides a junction box and wiring terminal board for accepting a third party 2, 3, or 4-wire RTD sensor. The temperature output can be reported in Fahrenheit, Celsius, or both. These ultra-low-powered transmitters are powered by replaceable battery packs that provide up to a 10-year life.<sup>1</sup> The push button LCD interface allows for device configuration and instant access to process data.

### Reliable, Scalable, and Safe


The field-proven wireless transmitters communicate with an assigned wireless gateway within the OTC Wireless Sensor and I/O Network creating a highly scalable network, accommodating virtually any I/O requirement.

The OleumTech wireless transmitters are certified for use in Class I, Division 1 (Zone 0) hazardous locations. They are Intrinsically Safe, designed not to cause a spark, and can be serviced without being removed from a process.

### Technical Specifications

### Networking Diagram

HARDWARE FEATURES	
Device Functionality	· Temperature Sensing Wireless Transmitter Using an RTD Sensor
Embedded Controller	· Ultra-Low Power RISC Microcontroller with Internal FLASH (Field Upgradeable)
Configuration	· Standard RS232 Serial / BreeZ® Software for PC
ADC Resolution	· 24-bit High-Resolution Delta-Sigma ADC
Power Source	· Self-Contained, Internal 3.6 Vdc Lithium Battery
Internal Battery Life	· Up to 10 Years, Based on User Defined Reporting Intervals <sup>1</sup>
Local LCD Display	· 32-Character Display (16x2 Lines) with 4 Function Keys + Read Button
Instant Displayable Read	· Temperature / Battery Voltage / RF Status
Local Configuration	· Integral LCD with Push Button Interface
Device Diagnostics	· Health Tags: Battery Voltage, Received Signal Strength Indication (RSSI), RF Refresh, RF Timeout, Error Codes
RTD TEMPERATURE SENSOR	
RTD Element	· Platinum 100 Ohm, Class A (RT1)
Temperature Coefficient	· 0.00385 (RT1)
Probe Lengths	· WT-RT1: 2" to 18" / 30.5 to 45.5 cm in 1" / 25 mm Increments
Temperature Range	· WT-RT1: -67 °F to 500 °F (-55 °C to 260 °C); WT-RT2: Temperature Range Depends on Sensor
Accuracy	· WT-RT1: ±0.15 °C / ±0.06% @ 0 °C; WT-RT2: Accuracy Depends on Sensor
Materials	· Probe Cover - Silver Coated Copper / Probe Insulation - PTFE
WIRELESS COMMUNICATIONS	
Radio Band	· ISM Band (License-Free)
900 MHz / 915 MHz	· FHSS, FSK, AES Encryption 256-bit (900 MHz), 128-bit (915 MHz)
2.4 GHz	· DSSS, AES Encryption 128-bit
868 MHz	· LBT-AFA, AES Encryption 128-bit
Bit Rate	· 900/915 MHz: 9600 bps / 115.2 kbps; 2.4 GHz: 250 kbps; 868 MHz: 80 kbps
Output Power (Max)	· 900/915 MHz: 10 mW; 2.4 GHz: 63 mW; 868 MHz: 25mW
Receiving Sensitivity	· 900/915 MHz: -110 dBm @ 9600 bps, -100 dBm @ 115.2 kbps · 2.4 GHz: -101 dBm @ 250 kbps; 868 MHz: -106 dBm @ 80 kbps
RF Range	· 900/915 MHz: Up to 7500 Feet / 1.4 Miles / 2.3 km with Clear Line of Sight <sup>2</sup> · 2.4 GHz: Up to 1.9 Miles / 3.1 km with Clear Line of Sight <sup>2</sup> · 868 MHz: Up to 1.5 Miles / 2.4 km with Clear Line of Sight <sup>2</sup>
CERTIFICATIONS & COMPLIANCE	
EMC/EMI	  <ul style="list-style-type: none"> <li>· FCC Part 15 (USA), IC ICES-003 (Canada), ACMA (Australia)</li> <li>· AS/NZS CISPR 32 (Australia), EN55032 &amp; EN55024 (EU)</li> </ul>
Safety	 <ul style="list-style-type: none"> <li>· Class I, Division 1, Groups A, B, C, D T3C; Ex ia IIC T3</li> <li>· Class I, Zone 0; AEx ia IIC T3</li> </ul>
	   <ul style="list-style-type: none"> <li>· ATEX: Sira 13ATEX2142X; Ex ia IIC T3 Ga; II 1 G</li> <li>· IECEx: SIR 13.0054X; Ex ia IIC T3 Ga</li> </ul>
MECHANICAL SPECIFICATIONS	
Dimensions, WT-RT1	· 5.5" (W) x 7.6" (H) x 4.4" (D) / 140 mm (W) x 193 mm (H) x 112 mm (D) - Excludes RTD Length
Dimensions, WT-RT2	· 5.5" (W) x 12.3" (H) x 6.4" (D) / 140 mm (W) x 313 mm (H) x 163 mm (D) - Excludes RTD Length
Package Dimensions	· 10.25" (W) x 14" (H) x 6.5" (D) / 260mm (W) x 356mm (H) x 165mm (D)
Package Weight, WT-RT1	· ~5.25 lbs / 2.4 kg
Package Weight, WT-RT2	· ~7 lbs / 3.2 kg
Connection Fitting	· WT-RT1: 1/2" NPT Male; WT-RT2: 3/4" NPT Female
Enclosure Casing Material	· Type 4X Aluminum; IP66
GENERAL SPECIFICATIONS	
Operating Conditions	<ul style="list-style-type: none"> <li>· Ambient Temperature (Class I, Division 1 / Zone 0): -40 °C to 70 °C (-40 °F to 158 °F)</li> <li>· LCD Screen -20 °C to 70 °C (-4 °F to 158 °F)</li> <li>· Ambient Temperature (Non-Hazardous Applications): -40 °C to 80 °C (-40 °F to 176 °F)</li> <li>· LCD Screen -20 °C to 70 °C (-4 °F to 158 °F)</li> <li>· Humidity: 0 to 99 %, Non-Condensing</li> </ul>
Warranty	· 2-Year Parts and Labor
Country of Origin	· USA
ORDERING INFORMATION	
Model Numbers	· Direct Mount: WT-0900-RT1, WT-0915-RT1, WT-2400-RT1, WT-0868-RT1 · Multi-Vendor: WT-0900-RT2, WT-0915-RT2, WT-2400-RT2, WT-0868-RT2
Wirelessly Connects To	· OTC Wireless Gateway
Configuration Cable	· SX1000-CC2, 20-ft All-in-One Configuration Cable
Replacement Battery	· Use OleumTech SX1000-BP3 Only

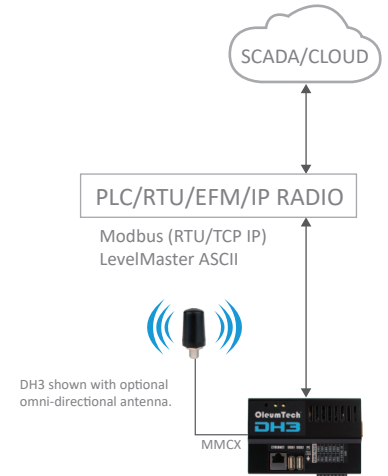

### OTC GATEWAY

### OTC TRANSMITTERS

Point-to-Multipoint  
"Star Topology"



<sup>1</sup>Ambient temperature and one transmission per 1 min interval without any retries were used to calculate battery life. Actual battery life may vary depending on environmental factors, application, and usage. Use data shown above only as general point of reference. See OleumTech Battery Life Expectancy Chart for predicted battery life based on reporting interval.

<sup>2</sup>The maximum RF range data was collected under optimal test conditions, including a clear line of sight between antennas. Actual wireless RF range may vary depending on location, RF interference, weather, antenna type, cable type, and line of sight.

©2020 OleumTech Corporation. All rights reserved. OleumTech and BreeZ are registered trademarks of OleumTech Corporation in the United States. All other trademarks and trade names are the property of their respective holders. Specifications, design, and product descriptions subject to change without notice. This device contains proprietary intellectual property protected by US Patent #6967589. Document ID: 67-4038-001\_5

